

VX-L420X

Key Features

- 4,200 lumens Brightness
- 10000:1 Contrast
- XGA(1024x768) Basic resolution
- 0.63" 3LCD
- x1.2 manual zoom, focus
- 3.2kg
- Corner keystone correction
- Curved Correction
- 10W speaker
- Quick Power Off




Specification


모델명 (Model Name)		VX-L420X
투사방식 (Display Technology)		0.63" 3LCD Polysilicon TFT active matrix
밝기 (Brightness)		4,200 lumens
명암비 (Contrast)		10000:1
해상도 (Native resolution)		XGA 1024x768
화면비 (Aspect ratio)		4:3
램프 (lamp)	램프번호 (Part Number)	23040052
	타입 (Type)	218W
	수명 (Lifetime)	10000 hrs (Eco) / 4000 hrs (Normal)
기본렌즈 (Lens)	렌즈 (Lens)	F 1.60-1.76 (f=19.16~23.02mm)
	투사비율 (Throw ratio)	1.48-1.78:1
	렌즈쉬프트 (Lens shift)	-
	키스톤 (Keystone)	Vertical ±30° Horizontal ±15°
	줌 (Zoom)	Manual x1.2
	포커스 (Focus)	Manual
종횡왜곡보정 (Geometric correction)		코너키스톤, 곡선보정
화면사이즈 (Diagonal)		30 ~ 300"
입력단자 (Input)		2 X 15-pin Mini D-sub (RGB) 2 X HDMI (MHL) 1 X RCA (Composite) 1 X Stereo mini jack (Audio) 1 X 2RCA (L/R) Audio
출력단자 (Output)		1 X 15-pin Mini D-sub (RGB IN2 Share) 1 X Stereo mini jack (Audio)
컨트롤/서비스 단자 (Control/Service)		1 X D-sub 9pin (RS232C) 1 X RJ-45 1 X USB (A) 1 X USB (B)
입력 신호 (Input signal)		VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WSXGA+, WUXGA, MAC
비디오 포맷 (Video Formats)		NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL 480i/p, 575i/p, 720p, 1080i/p
작동 온도 (Temperature)		5 ~ 40°C
스피커 (Speaker)		10W
팬 소음 (Fan Noise)		38.9 dB (Normal) / 34.9 dB (Eco)
정격 전압 (Operating voltage)		AC 100-240V, 50/60Hz
소비 전력 (Power consumption)		270W (Normal) / 180W (Eco) / 0.5W (Stand-by)
규격 (Size)		(W)347 x (H)109 x (D)257 mm
무게 (Weight)		3.2kg

※ 제품의 외관 및 사양은 성능 개선을 위해 사전 예고 없이 변경될 수 있습니다.

Terminals

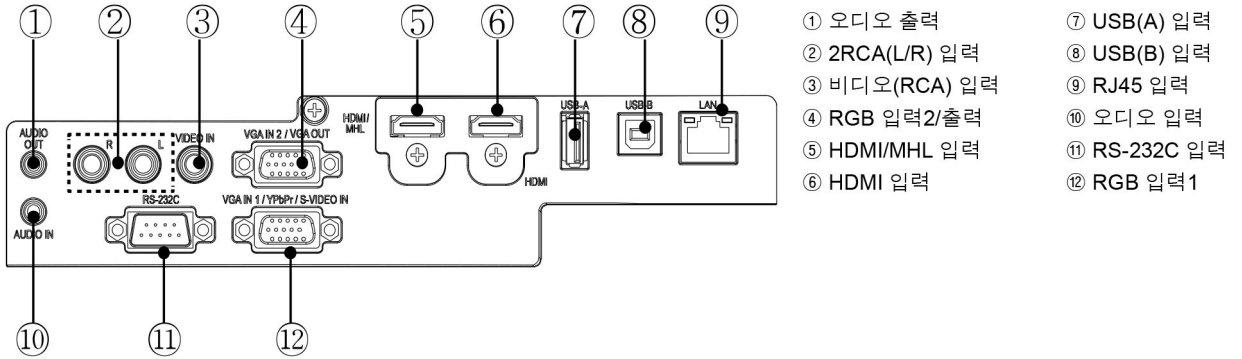

Dimension

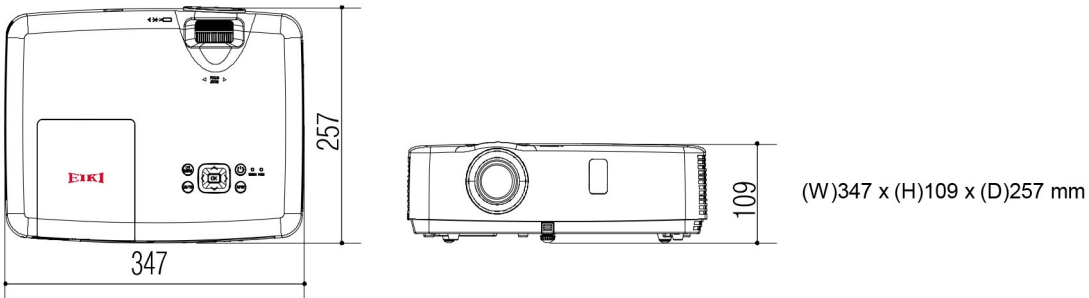

Throw Distance

렌즈명	VX-L420X	
F값	F 1.6-1.76	
초점거리	f=19.16~23.02mm	
투사거리비율	1.48-1.78:1	
줌/포커스	x1.2 Manual	
해상도	XGA (1024x768) 4:3	
인치	최소	최대
40	1.2	1.5
60	1.8	2.2
80	2.4	2.9
100	3.0	3.6
120	3.6	4.4
150	4.5	5.5
180	5.4	6.6
200	6.1	7.3
250	7.5	9.1
300	9.1	10.9

※ 거리단위: m / 모든 측정 수치는 대략의 수치이며, 실제 사이즈와 다소 차이가 있을 수 있습니다. (±7%)

※ 제품의 외관 및 사양은 성능 개선을 위해 사전 예고 없이 변경될 수 있습니다.